

RMC-1000



RMC-1000

Industrial rack-mount Ethernet to fiber media converter Chassis with 18 slots


Features

- Supports 18 slots for media converter
- Each slot supports RMC-111PB/111FB/121FB series with 10/100Base-T(X) auto-negotiation and auto-MDI/MDI-X
- Supports single-mode or multi-mode for 100Base-FX interface
- Dual-power supply design for power redundancy
- Hot-swappable for Media Converters and power supplies
- High reliability and easy installation
- 19 inches Rack-mount enabled




Introduction

RMC-1000 is the rack-mounted chassis box for RMC-111/121FB series media converter. RMC-1000 with 18 slots for Ethernet to optical fiber media converters which provide media conversion between 10/100Base-T(X) and 100Base-FX. Its dual power supply design can avoid interruption caused by power failure. In addition, media converter is also hot-swappable for each slot and can be installed easily. Therefore, RMC-1000 is reliable rack-mount chassis for media converter for high-density of media conversion application.

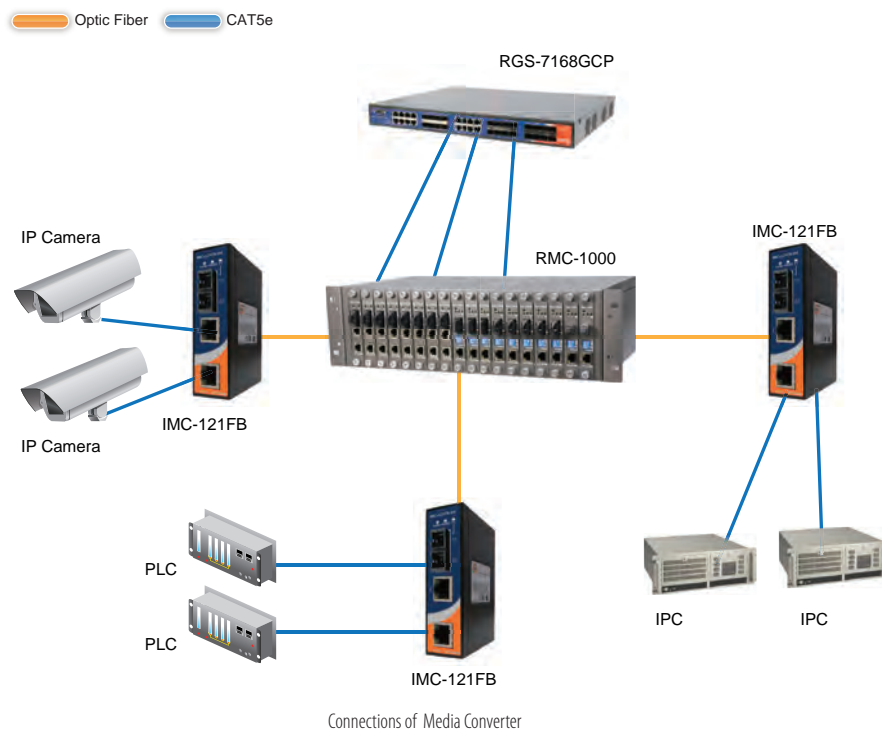

Connections of Media Converter

Dimensions

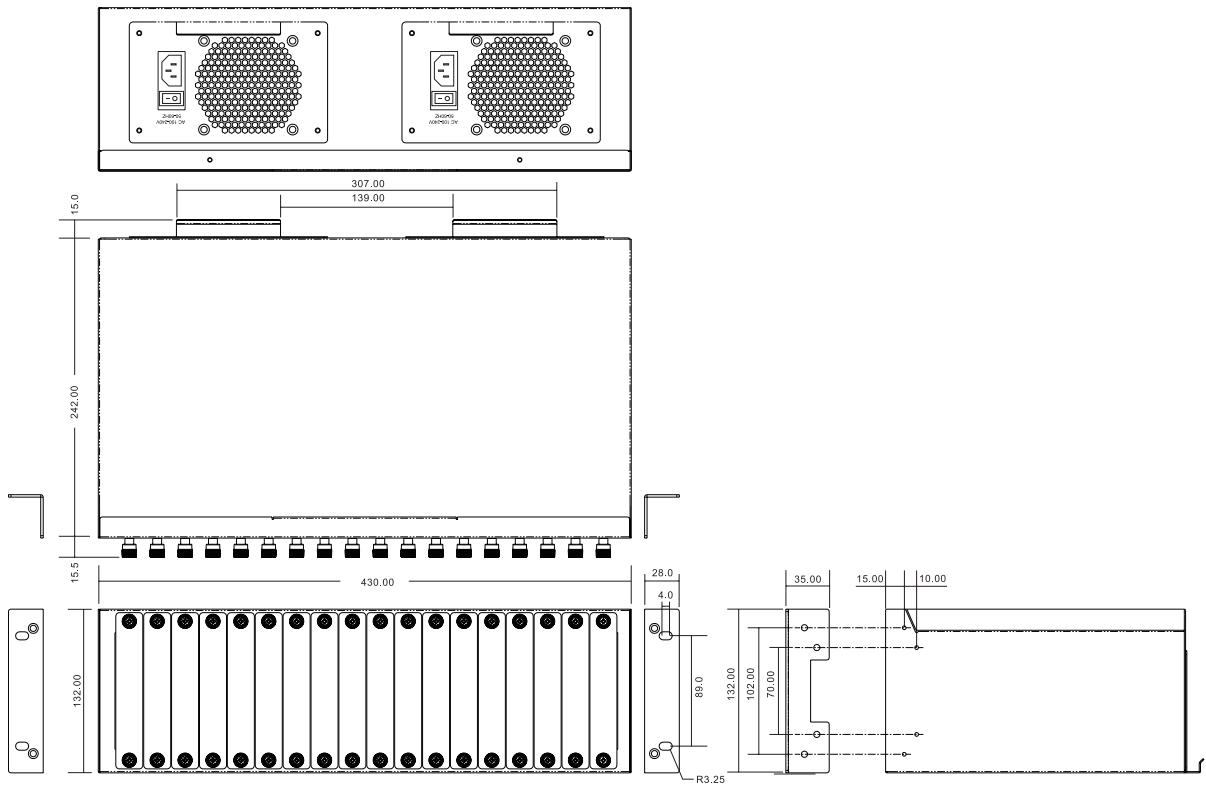

Specifications

| ORing Chassis Media Converter Model | RMC-1000 |
|-------------------------------------|--|
| Physical Ports | |
| Slot number | 18 |
| Power | |
| Input power | Two optional 100~240VAC power inputs |
| Overload current protection | Present |
| Physical Characteristics | |
| Dimension (W x D x H) | 430 (W) x 243 (D) x 132 (H) mm (16.93 x 9.57 x 5.2 inch) |
| Weight (g) | 4955 g |
| Environmental | |
| Storage Temperature | -40 to 85°C (-40 to 185°F) |
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Operating Humidity | 5% to 95% Non-condensing |

| Regulatory Approvals | |
|---|--|
| EMI | FCC Part 15, CISPR (EN55022) class A |
| EMS | EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11 |
| Shock | IEC60068-2-27 |
| Free Fall | IEC60068-2-32 |
| Vibration | IEC60068-2-6 |
| MTBF (Hours) (MIL-HDBK-217F2, GB, GC, 25°C) | 870,520 |
| Warranty | 2 years |

Ordering Information

| Available Model | Model Name | Description |
|--|------------|--|
| | RMC-1000 | Industrial Rack-mount Ethernet to fiber media converter Chassis with 18 slots |
| Packing List <ul style="list-style-type: none"> RMC-1000 Rack-mount Kit Quick Installation Guide | | Optional Products (Can be purchased separately) <ul style="list-style-type: none"> RMC-111PB: Industrial Rack mount card type Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, SFP socket RMC-111FB-MM: Industrial Rack mount card type Ethernet to fiber media converter with 12x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector RMC-111FB-SS: Industrial Rack mount card type Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, single-mode, 30Km/1310nm, SC connector RMC-121FB-MM: Industrial Rack mount card type Ethernet to fiber media converter with 2x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector RMC-121FB-SS: Industrial Rack mount card type Ethernet to fiber media converter with 2x10/100Base-T(X) and 1x100Base-FX, single-mode, 30Km/1310nm, SC connector RPM-130-AC-EU-R10: 130W rack mount 12VDC/10.8A Power Supply Module with universal 100 to 240VAC input, EU power cord RPM-130-AC-US-R10: 130W rack mount 12VDC/10.8A Power Supply Module with universal 100 to 240VAC input, US power cord FPC series: Fiber Patch cord |