


SWM-20GT-HSR

Industrial 2-port 100/1000 SFP combo HSR /PRP modular



Features

- Designed for use with RGS-P(R)9000 series
- 2-port 100/1000 SFP combo HSR /PRP
- IEC 62439-3 Clause 4 (PRP) and Clause 5 (HSR) compliant.
- Wide operating temperature ranges from -40 to 85°C

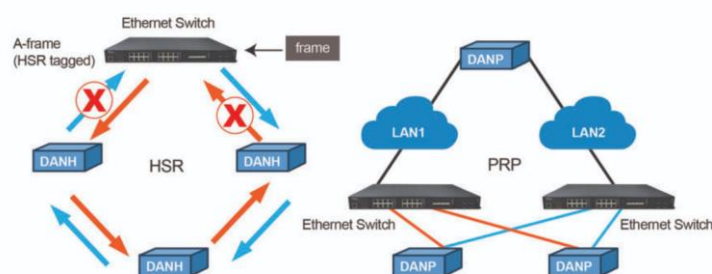

IEC 61850-3
Power Substation

Product Description

The SWM-20GT-HSR expansion module includes 2-port 100/1000Base-SFP combo ports and a PRP/HSR module for industrial Ethernet applications. The module is designed to provide flexible network connections for industrial use.

The PRP/HSR expansion module complies with IEC 62439-3 Clause 4 (PRP) and Clause 5 (HSR). It helps provide high system availability and reliable data transmission for critical applications with network redundancy and zero recovery time.


Specifications

Hardware Specifications	
10/100/1000BaseT(X) Ports (RJ45 connector)	2
100/1000BaseSFP Slots	2
Isolation Protection	1.5KV
Operating Temperature	-40 to 85 °C (-40 to 185 °F)

Physical Characteristic	
Enclosure	IP-30
Dimension	99 (W) x 170.6 (D) x 41.8(H) mm

Dimensions

Unit: mm [inch]

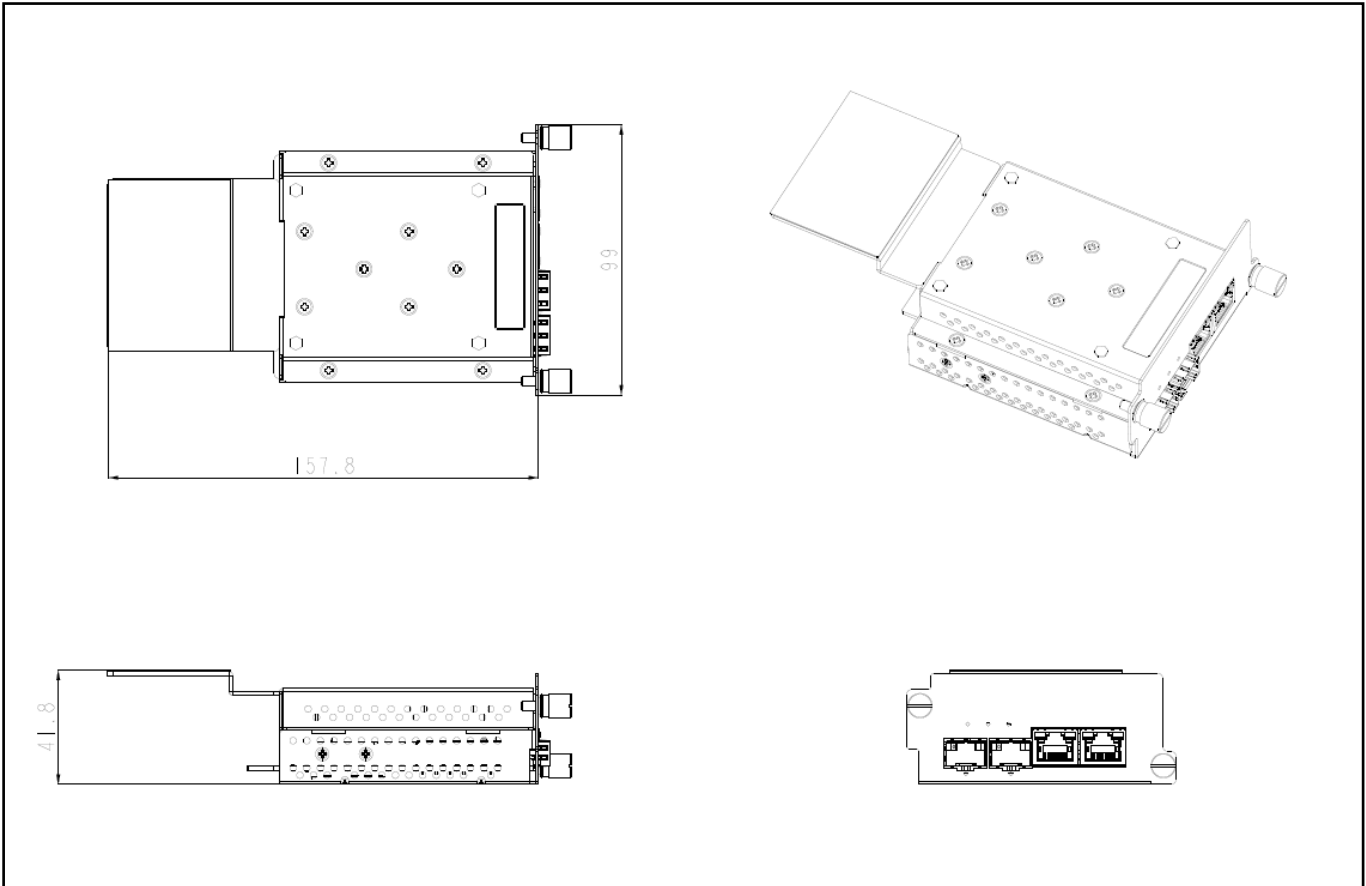

Ordering Information

For RGS-P(R) 9000 slot 1~3

SWM-20GT-HSR

Industrial 2-port 100/1000 SFP combo HSR /PRP modular

ORing Industrial Networking

All specifications are subject to change without notice.

Last updated: 2026/5/13