



# RGPS-3244GP-P

**Industrial 28-port Gigabit managed PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x100/1000Base-X, SFP socket**



## Features


- Redundant Ethernet Ring: **O-Ring** (recovery time < 30ms over 250 units of connection)
- **O-Chain** allow multiple redundant network rings
- Support standard IEC 62439-2 MRP (Media Redundancy Protocol) function
- STP/RSTP/MSTP supported
- 24 port P.S.E. fully compliant with IEEE802.3/at standard, provide up to 30 Watts per port ,total power output of 360W
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- IEEE802.1Q VLAN
- Port Trunking for easy of bandwidth management
- SNMP v1/v2c/v3 support for secured network management
- RMON for traffic monitoring
- Support LLDP protocol
- Event notification through Syslog, SNMP trap.
- 19 inches rack mountable design



## Introduction

RGPS-3244GP-P is a rack mount Gigabit managed PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. ports and 4x100/1000Base-X · SFP socket . With completely support of Ethernet Redundancy protocol, O-Ring (recovery time < 30ms over 250 units of connection), O-Chain and MSTP/RSTP/STP (IEEE 802.1s/w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology. RGPS-3244GP-P also support Power over Ethernet, a system to transmit electrical power up to 30 watts, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. It is specifically designed for the toughest industrial environments. In addition, the wide operating temperature range from -40 degrees C to 75 degrees C can satisfy most of operating environment.

## Dimensions

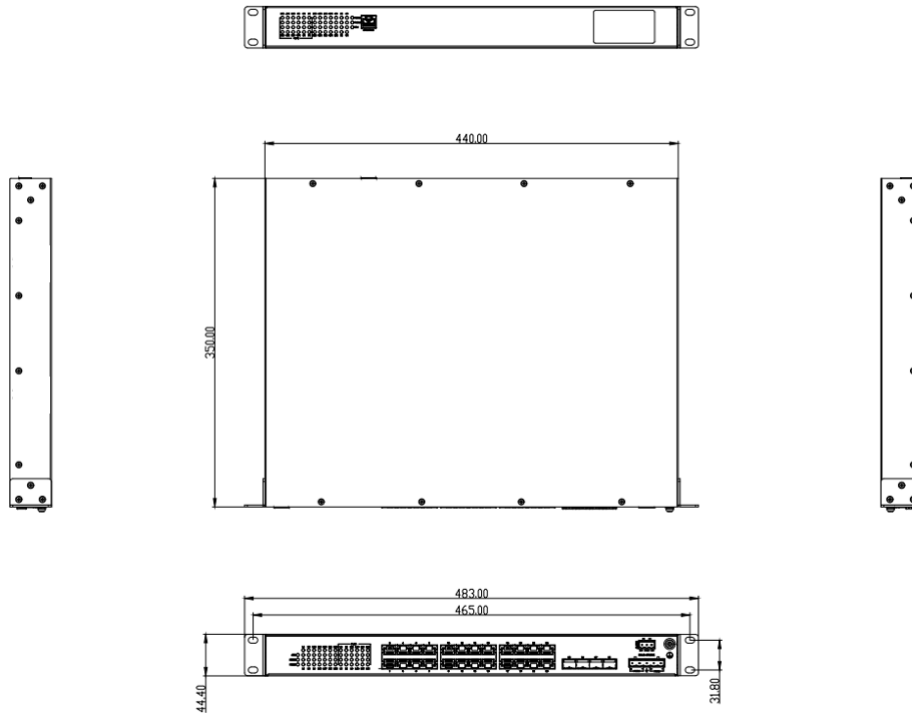

## Specifications

ORing Switch Model	RGPS-3244GP-P
<b>Physical Ports</b>	
10/100/1000Base-T(X) with PoE Ports in RJ45	24
Gigabit SFP	4
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1D for STP (Spanning Tree Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3af/at PoE specification (Per PoE port up to 30 watts)
MAC Table	8k
Priority Queues	4
Processing	Store-and-Forward
Jumbo Frames	9712Bytes
Switch Properties	Switching latency: 10us Switching bandwidth: 56Gbps Packet buffer: 4.1Mbit Max. Number of Available VLANs: 4096 IGMP multicast groups: 1024
Security Features	Enable/disable ports, MAC based port security Port based network access control (802.1x) VLAN (802.1Q) to segregate and secure network traffic

	SNMP v1/v2c/v3 encrypted authentication and access security
Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 30ms over 250 units TOS/Diffserv supported TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP supported IGMP Snooping for multicast filtering Port configuration, status, statistics, monitoring, security SNTP for synchronizing of clocks over network DHCP Server / Client support Port Trunk support
Network Redundancy	O-Ring O-Chain MRP STP/RSTP/MSTP
RS-232 Serial Console Port	RS-232 in RJ45 connector with console cable. 115200bps, 8, N, 1
Transmission Disatance	RJ45 Port: - Up to 100 meters for 10/100/1000Mbps link speed (4-wire Cat.5e or above cable suggested) SFP Slot: Up to 120Km (depends on SFP transceiver)
<b>LED Indications</b>	
Power	Green: Indicate power on
R.M	Green: Indicate system operated in O-Ring Master mode
Ring	Green: Indicate system operated in O-Ring mode
PoE	Green: Indicate PoE in-use
10/100/1000Base-T RJ45 Port	Green: Indicate Link/Act
100/1000Base-X SFP	Green: Indicate Link/Act
<b>Power</b>	
Input power	85-265VAC/100-300VDC on 5-pin Terminal block
Power consumption (Typ.)	Standby: ≤10W Full Load: ≤25W (Non-POE Powered); ≤390W (POE Powered)
POE Output Power	360W
Overload current protection	Present
Reverse Polarity Protection	Present
<b>Physical Characteristic</b>	
Enclosure	IP-30
Dimension (W x D x H)	440 x 350 x 44.4 mm / 18.31 x 13.78 x 1.75 inch
Weight	≤5KG
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory Approvals</b>	
EMC	CE EMC (EN 55035, EN 55032), FCC Part 15B
EMI	EN 55035, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55024 (IEC/EN 61000-4-2(ESD), IEC/EN 61000-4-3(RS), IEC/EN 61000-4-4(EFT), IEC/EN 61000-4-5(Surge), IEC/EN 61000-4-6(CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11(DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN 62368-1
<b>Warranty</b>	5 years

## Ordering Information

Available Model	Model Name	Description	PoE power Budget
	RGPS-3244GP-P	Industrial 24-port managed Gigabit PoE Ethernet switch +4G SFP ports	360W
	RGPS-3244GP-P _EU	Industrial 24-port managed Gigabit PoE Ethernet switch +4G SFP ports, EU power cord	
	RGPS-3244GP-P _US	Industrial 24-port managed Gigabit PoE Ethernet switch +4G SFP ports, US power cord	

## Packing List

- RGPS-3244GP-P x 1
- Quick Installation Guide x 1
- Console cable x 1