

# IGPS-3084GP-LA



ORing WEB-site

## Industrial 12-port managed Gigabit PoE Ethernet switch with 8x10/100/1000Base-T(X) P.S.E. and 4x100/1000Base-(F)X, SFP socket

### Features

- World's fastest Redundant Ethernet Ring: O-Ring (recovery time < 30ms over 250 units of connection)
- O-Chain allow multiple redundant network rings
- Support standard IEC 62439-2 MRP (Media Redundancy Protocol) function
- MSTP/RSTP/STP (IEEE 802.1s/w/D) supports
- Supports IPV6 new internet protocol version
- 8 ports P.S.E. fully compliant with IEEE802.3at standard, provide up to 30 Watts per port
- Provide PoE power on delay function, users can define delay time for PoE power supply
- Supports Auto Negotiation Speed
- Support Modbus TCP protocol
- Provided HTTPS/SSH protocol to enhance network security
- IGMP v2/v3 (IGMP snooping for support) filtering multicast traffic
- Supports SNMP v1/v2c/v3 & RMON & 802.1Q VLAN Network Management
- Supports ACL, TACACS+ and 802.1x User Authentication for security
- Port Trunking for easy of bandwidth management
- Event notification through Syslog server / client, Email and SNMP trap
- RMON for traffic monitoring
- Support LLDP protocol
- Rigid IP-30 housing design
- DIN-Rail mounting enabled
- Web-based, Telnet and Console (CLI) configuration




### Introduction

IGPS-3084GP-LA is managed redundant ring Gigabit PoE Ethernet switch with 8x10/100/1000Base-T(X) ports with 30Watts PoE (P.S.E.) function and 4x100/1000Base-(F)X SFP sockets. With completely support of Ethernet redundancy protocol, O-Ring (recovery time < 30ms over 250 units of connection), O-Chain, MRP and MSTP/RSTP/STP (IEEE 802.1s/w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. Another O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology. IGPS-3084GP-LA also supports Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each IGPS-3084GP-LA switch had 8X10/100/1000Base-T(X) 30Watts P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE setup. IGPS-3084GP-LA supports DDM (Digital Diagnostic Monitoring) function, which can monitor instantly the status of electronic voltage, current and temperature. In addition, the wide operating temperature range from -40 to 75°C can satisfy most of operating environment. Therefore, these switches are one of the most reliable choices for highly-managed and Fiber Ethernet application with PoE function.

- **O-Ring:** O-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The O-Ring redundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.
- **O-Chain:** O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.

- **MRP: Media Redundancy Protocol (MRP)** is a data network protocol standardized by the IEC 62439-2. It allows rings of Ethernet switches to overcome any single failure with recovery time much faster than achievable with Spanning Tree Protocol.
- **Modbus TCP:** This is a Modbus variant used for communications over TCP/IP networks.

Dimensions

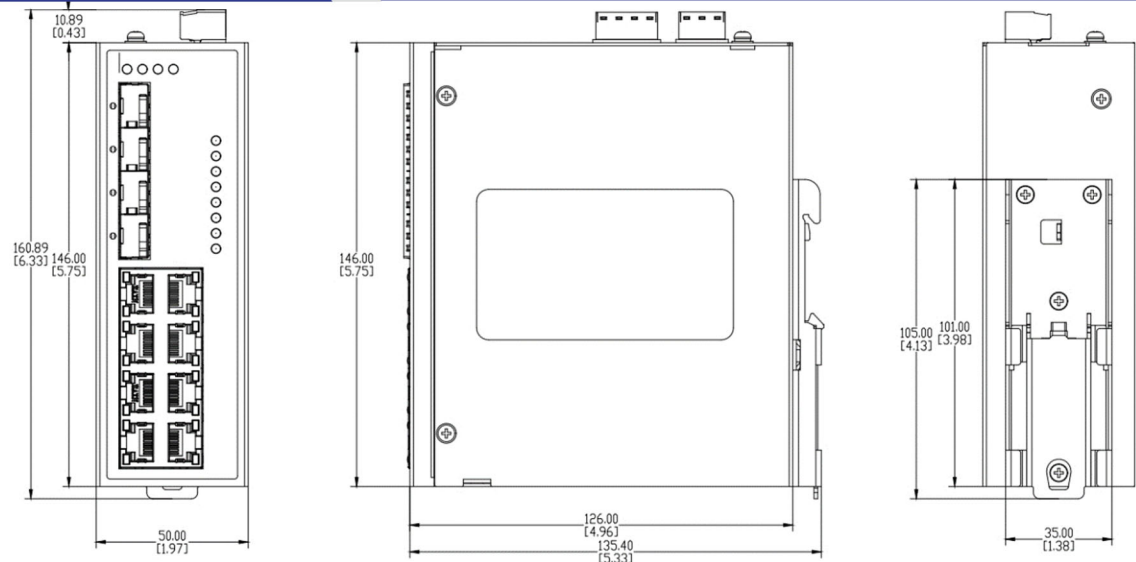

Specifications

ORing Switch Model	IGPS-3084GP-LA
Physical Ports	
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX with P.S.E.	8
100/1000Base-(F)X SFP Sockets	4
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3z for 1000Base-X IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1D for STP (Spanning Tree Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3at PoE specification (up to 30 Watts per port for P.S.E.) IEEE 802.3af PoE specification (up to 15.4 Watts per port for P.S.E.)
MAC Table	8K
Packet Buffer Size	4.1Mbits
Priority Queues	8
Processing	Store-and-Forward
Jumbo Frame	Up to 10K bytes
Switch Properties	Switching latency: 10 us Switching bandwidth: 24Gbps Max. Number of Available VLANs: 4096

	VLAN ID Range: VID 1 to 4095 IGMP multicast groups: 1024 Port rate limiting: User Define
Security Features	HTTPS/SSH enhance network security TACACS+ centralized authentication, authorization, and accounting for network devices RADIUS client forwards user authentication requests to a RADIUS server Access Management controls access to organizational resources IP source guard prevents IP spoofing Port based network access control (802.1x) Port security limit control the number of MAC addresses on a port VLAN (802.1Q) to segregate and secure network traffic SNMP V1/V2c/V3 manages and collects data from network devices. RMON enables remote monitoring and analysis of network traffic and performance. MIB organizes and stores data for managing network devices
Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 30ms over 250 units Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP/GARP supported MVR (Multicast VLAN Registration) supported Q-in-Q supported IGMP v2/v3 Snooping for multicast filtering Port configuration, status, statistics, monitoring, security SNTP client synchronizes the system clock with an NTP server NTP server/client for synchronizes the system clock DHCP Server/Client/Relay/Option-82 supports Port Trunk/LACP supports Port mirror for monitoring Modbus TCP enables device communication over TCP/IP networks
Network Redundancy	O-Ring O-Chain MRP MSTP/RSTP/STP ORing fast recovery
RS-232 Serial Console Port	RS-232 in RJ45 connector with console cable. 115200bps, 8, N, 1
LED Indicators	
Power Indicator (PWR1/2)	Green: Power LED x 2
Ring Master Indicator (R.M.)	Green: Indicates that the system is operating in O-Ring Master mode.
O-Ring Indicator (Ring)	Green: Indicates that the system operating in O-Ring mode. Green Blinking: Indicates that the Ring is broken.
10/100/1000Base-T(X) RJ45 Port Indicator	Top Green for Link/Act indicator: On for link-up, Off for link-down, Blinking for Act. Bottom Green for Speed indicator: On for 1Gbps, Off for 10/100Mbps
100/1000Base-(F)X SFP Port Indicator	Green for Link/Act indicator: Green for link-up, Off for link-down, Blinking for Act.
PoE Indicator	Green for PoE indicator: On for PoE enabled, Off for PoE disabled
Relay	Relay output to carry capacity of 1A at 24VDC
Reset Function	
Reset Button	< 5 sec: System reboot, > 5 sec: Factory default
Power	
Redundant Input Power	Dual DC inputs, 48~57VDC on 4-pin terminal block
Power Consumption (Typ.)	20 Watts (PoE output power not included)
PoE Total Power Budget	150 Watts Max.
Overload Current Protection	Present
Reverse Polarity Protection	Presented (not working)
Physical Characteristic	
Enclosure	IP-30 Aluminum
Dimension (W x D x H)	50 (W) x 126 (D) x 146 (H)mm 1.96 (W) x 4.96 (D) x 5.75 (H) inch
Weight (g)	945 g (N.W) / 1265 g (G.W)

Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% non-condensing
Regulatory Approvals	
EMC	CE EMC (EN 55035, EN 55032), FCC Part 15 B
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55035 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN 62368-1
Warranty	5 years

Ordering Information

Available Model	Model Name	Description
	IGPS-3084GP-LA	Industrial 12-port managed Gigabit PoE Ethernet switch with 8x10/100/1000Base-T(X) P.S.E. and 4x100/1000Base-(F)X, SFP socket
<b>Packing List</b> <ul style="list-style-type: none"><li>IGPS-3084GP-LA (DIN-Rail Kit included) x 1</li><li>ORing Tool CD Card x 1</li><li>Quick Installation Guide x 1</li><li>Console Cable x 1</li></ul>		<b>Optional Accessories</b> <ul style="list-style-type: none"><li>SFP100 series: 100Mbps SFP optical transceiver</li><li>SFP 1G series: 1Gbps SFP optical transceiver</li><li>SDR/NDR Series DIN-Rail power supply</li></ul>